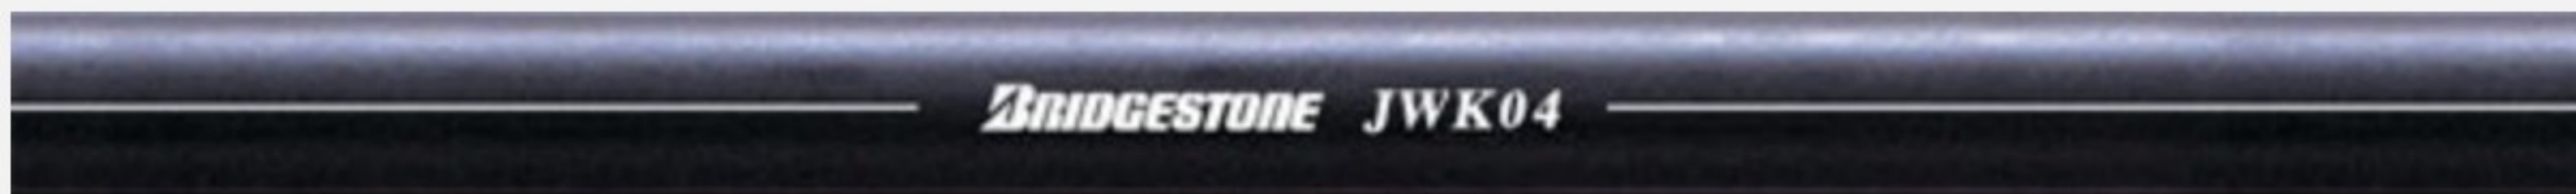








**Maximum Working Pressure : 98.0~137.0MPa / 14,200~19,900PSI**



Catalog Number														
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight		Reinforcement	Coupling Series
	inch	mm	inch	mm	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m		
JWK04	1/4	6.3	0.73	18.6	19,900	137.1	39,928	275.0	3.54	90	0.30	850	4S+1W	EK
JWK06	3/8	9.5	0.97	24.6	14,200	98.0	31,805	219.5	4.72	120	0.43	1,150		
JWK08	1/2	12.7	1.09	27.8	14,200	98.0	27,820	192.0	6.69	170	0.55	1,360		

Compatible Fluid	Mineral Oil
Temperature Range : fluid	-40°C to 100°C (-40°F to 212°F)
Temperature Range : ambient	-40°C to 70°C (-40°F to 158°F)
Inner Tube	Oil Resistant Synthetic Rubber
Outer Cover	Weather Resistant Synthetic Rubber

**Reinforcement**

**4S+1W**

4 spiral wires +  
1 wire braid

