

# Oil Suction & Discharge Hose




Model: OSD150

**INTER OSD150 -- OIL SUCTION & DISCHARGE HOSE -- WP 150 PSI**

## Application

For suction and discharge of petroleum products of up to 50% aromatic contents in refineries, general factories and vessels.

Tube	Oil resistant synthetic rubber - seamless tube
Reinforcement	High tensile synthetic fabric embedded with steel helical body wire
Cover	High abrasion and oil resistant synthetic rubber
Color	Black
Surface	Fabric-wrapped finish, smooth
Operating temperature	-20 C to +82 C
Min. bending radius	6 x ID
Safety factor	3:1
Branding	Red transfer tape with white text

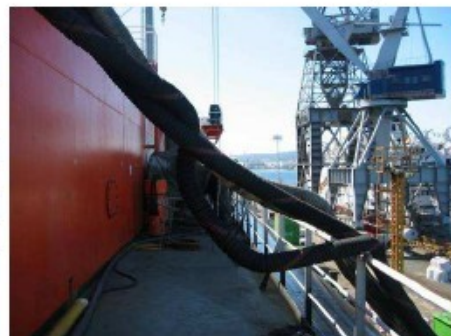

Product code	ID inch	ID mm	OD mm	WP		BP		Length m	Price (in.Vat) Baht/m
				bar	PSI	bar	PSI		
BI-41101	1	25	35.4	10	150	30	450	40	830.00 *
BI-41102	1.1/4	32	42.4	10	150	30	450	40	865.00 *
BI-41103	1.1/2	38	50.0	10	150	30	450	40	980.00 *
BI-41104	2	51	63.0	10	150	30	450	40	1,345.00 *
BI-41105	2.1/2	63	75.0	10	150	30	450	40	1,885.00 *
BI-41106	3	76	92.8	10	150	30	450	40	2,095.00 *
BI-41107	3.1/2	90	109.2	10	150	30	450	40	2,905.00 *
BI-41108	4	102	121.2	10	150	30	450	40	2,970.00 *
BI-41109	5	127	157.0	10	150	30	450	20	5,510.00 *
BI-41110	6	152	190.0	10	150	30	450	20	6,385.00 *
BI-41111	8	203	245.0	10	150	30	450	15	12,245.00 *