








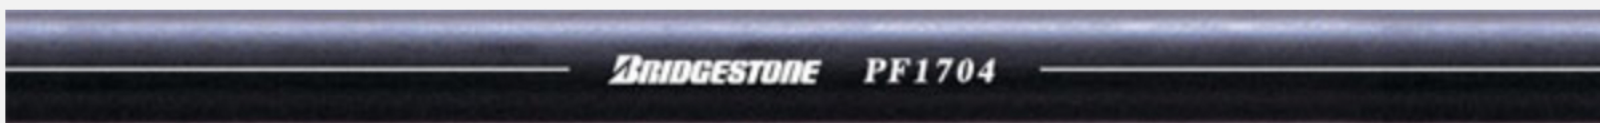

**Maximum Working Pressure : 17.0MPa / 2,500PSI**




Catalog Number														
	I.D.		O.D.		Max.W.P.		Min.B.P.		Min.B.R.		Weight		Reinforcement	Coupling Series
	inch	mm	inch	mm	psi	MPa	psi	MPa	inch	mm	lbs/ft	g/m		
PF1704	1/4	6.3	0.49	12.5	2,500	17.0	10,000	68.0	1.77	45	0.13	190	1W	UZ
PF1706	3/8	9.5	0.67	16.9	2,500	17.0	10,000	68.0	2.36	60	0.22	330		UB
PF1708	1/2	12.7	0.78	19.8	2,500	17.0	10,000	68.0	3.15	80	0.33	500	2W	UZ

Compatible Fluid	Mineral Oil
Temperature Range : fluid	-40°C to +100°C (-40°F to +212°F)
Temperature Range : ambient	-40°C to +70°C (-40°F to +158°F)
Inner Tube	Oil Resistant Synthetic Rubber
Outer Cover	Weather Resistant Synthetic Rubber

**Reinforcement**

**1W**

1 wire braid



**2W**

2 wire braids

